


mono·mounts®

best for single panel installations

| Aluminium | | Standard Sizes | | | Dimensions |
|---|--------|----------------|----|-----|------------|
| Small | Medium | Large | XL | XXL | |
| <p>This range is available in a natural aluminium finish.</p> | | | | | |
| | | | | | |

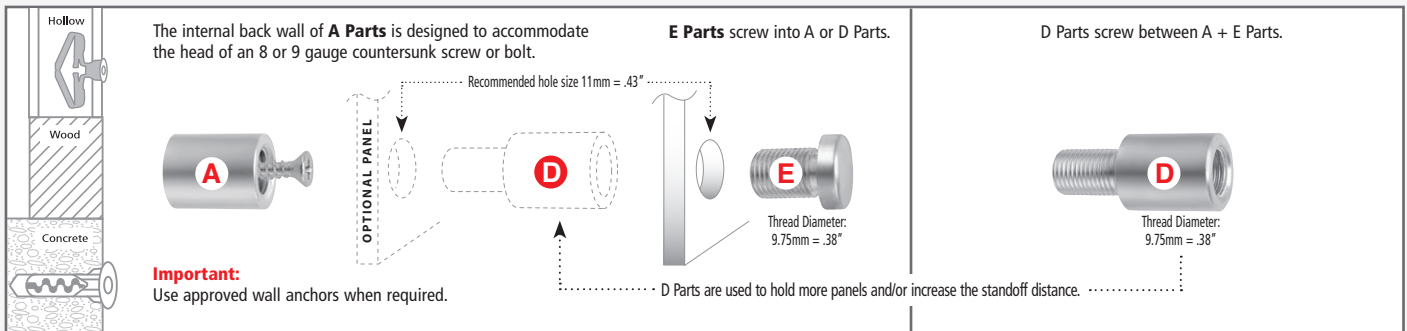

| Standard A + E Parts | Maximum Part Capacities | | Optional Extra D Parts | |
|---|--|-------------------------------|--|-------------------------------|
| PART ▶ | E PARTS | | D PARTS | |
| SIZE | Metric | Imperial | Metric | Imperial |
| SMALL Max load per part Max panel weight Max panel thickness | 18 kgs 36 kgs 4mm | 39.6 lbs 79.2 lbs .16" | 18 kgs 36 kgs 4mm | 39.6 lbs 79.2 lbs .16" |
| MEDIUM Max load per part Max panel weight Max panel thickness | 24 kgs 48 kgs 8mm | 52.8 lbs 105.6 lbs .31" | 24 kgs 48 kgs 8mm | 52.8 lbs 105.6 lbs .31" |
| LARGE Max load per part Max panel weight Max panel thickness | 30 kgs 60 kgs 12mm | 66 lbs 132 lbs .47" | 30 kgs 60 kgs 12mm | 66 lbs 132 lbs .47" |
| XL Max load per part Max panel weight Max panel thickness | 36 kgs 72 kgs 16mm | 79.2 lbs 158.4 lbs .63" | 36 kgs 72 kgs 16mm | 79.2 lbs 158.4 lbs .63" |
| XXL Max load per part Max panel weight Max panel thickness | 42 kgs 84 kgs 19mm | 92.4 lbs 184.8 lbs .75" | 42 kgs 84 kgs 19mm | 92.4 lbs 184.8 lbs .75" |
| IMPORTANT | <ul style="list-style-type: none"> Maximum load per monomount should not exceed the maximum load per E Part. Maximum total load should not exceed the maximum panel weight Maximum panel weight is fixed and does not increase with extra monomounts. | | Installers must ensure that: <ul style="list-style-type: none"> Any of the limits detailed above are not exceeded. A Parts are securely fixed using screws or bolts that are strong enough to support the total load. When A Parts are mounted on brick, concrete or hollow walls etc then anchors, cavity fasteners, plugs or toggles designed for use with that type of wall are used. | |