


# mono·mounts®

best for single panel installations

Brass		Standard Sizes			Dimensions
Small	Medium	Large	XL	XXL	
<p>4mm .16" 15mm .59" 12.50mm .49"</p>	<p>5mm .20" 20mm .79" 15.68mm .62"</p>	<p>6mm .24" 25mm .98" 18.85mm .74"</p>	<p>7mm .28" 30mm 1.18" 25.20mm .99"</p>	<p>8mm .31" 35mm 1.38" 31.55mm 1.24"</p>	

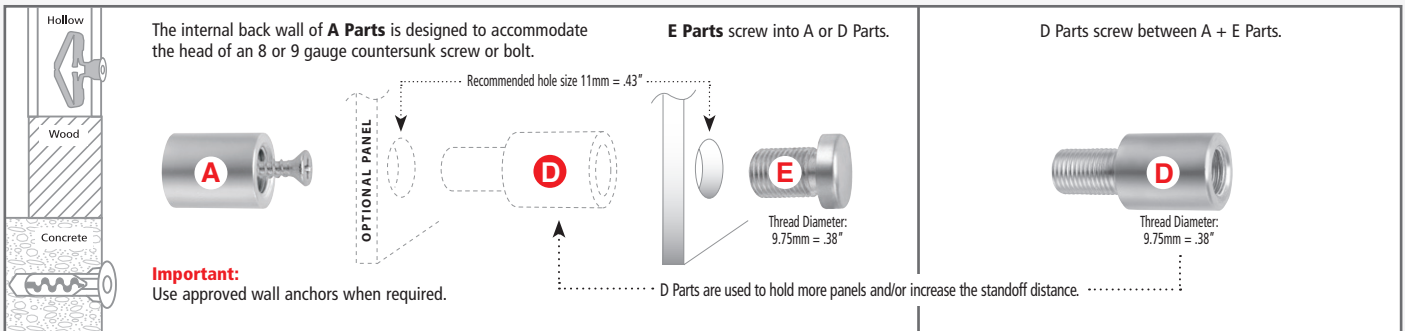

Standard <b>A + E</b> Parts	Maximum Part Capacities		Optional Extra <b>D</b> Parts	
PART ▶	E PARTS		D PARTS	
SIZE	Metric	Imperial	Metric	Imperial
<b>SMALL</b> Max load per part Max panel weight Max panel thickness	18 kgs 36 kgs 4mm	39.6 lbs 79.2 lbs .16"	18 kgs 36 kgs 4mm	39.6 lbs 79.2 lbs .16"
<b>MEDIUM</b> Max load per part Max panel weight Max panel thickness	24 kgs 48 kgs 8mm	52.8 lbs 105.6 lbs .31"	24 kgs 48 kgs 8mm	52.8 lbs 105.6 lbs .31"
<b>LARGE</b> Max load per part Max panel weight Max panel thickness	30 kgs 60 kgs 12mm	66 lbs 132 lbs .47"	30 kgs 60 kgs 12mm	66 lbs 132 lbs .47"
<b>XL</b> Max load per part Max panel weight Max panel thickness	36 kgs 72 kgs 16mm	79.2 lbs 158.4 lbs .63"	36 kgs 72 kgs 16mm	79.2 lbs 158.4 lbs .63"
<b>XXL</b> Max load per part Max panel weight Max panel thickness	42 kgs 84 kgs 19mm	92.4 lbs 184.8 lbs .75"	42 kgs 84 kgs 19mm	92.4 lbs 184.8 lbs .75"
<b>IMPORTANT</b>	<ul style="list-style-type: none"> <li>Maximum load per monomount should not exceed the maximum load per E Part.</li> <li>Maximum total load should not exceed the maximum panel weight</li> <li>Maximum panel weight is fixed and does not increase with extra monomounts.</li> </ul>		<b>Installers must ensure that:</b> <ul style="list-style-type: none"> <li>Any of the limits detailed above are not exceeded.</li> <li>A Parts are securely fixed using screws or bolts that are strong enough to support the total load.</li> <li>When A Parts are mounted on brick, concrete or hollow walls etc then anchors, cavity fasteners, plugs or toggles designed for use with that type of wall are used.</li> </ul>	