


mono·mounts®

best for single panel installations

Hybrid	Standard Sizes			Dimensions
Small	Medium	Large	XL	

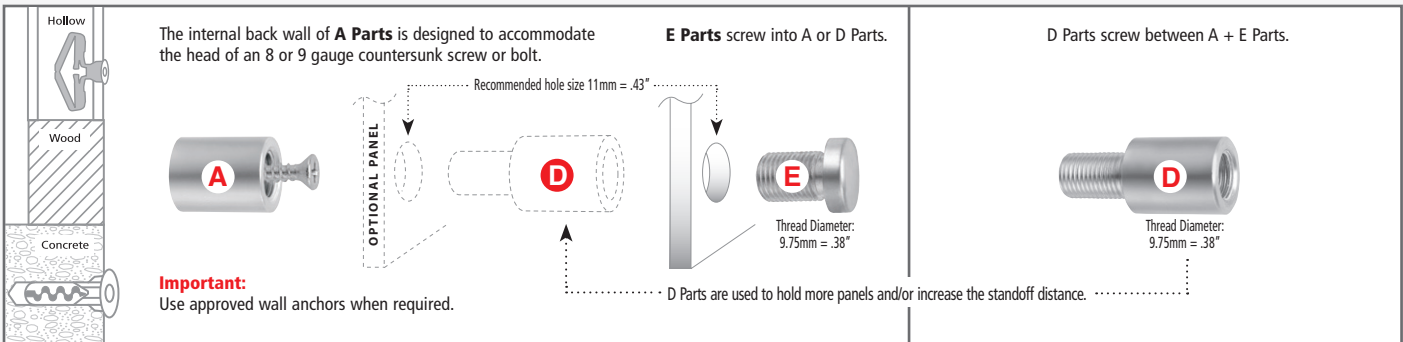

Standard A + E Parts	Maximum Part Capacities		Optional Extra D Parts	
PART ▶	E PARTS		D PARTS	
SIZE	Metric	Imperial	Metric	Imperial
SMALL Max load per part Max panel weight Max panel thickness	6 kgs 12 kgs 4mm	13.2 lbs 26.4 lbs .16"	6 kgs 12 kgs 4mm	13.2 lbs 26.4 lbs .16"
MEDIUM Max load per part Max panel weight Max panel thickness	8 kgs 16 kgs 8mm	17.6 lbs 35.2 lbs .31"	8 kgs 16 kgs 8mm	17.6 lbs 35.2 lbs .31"
LARGE Max load per part Max panel weight Max panel thickness	10 kgs 20 kgs 12mm	22 lbs 44 lbs .47"	10 kgs 20 kgs 12mm	22 lbs 44 lbs .47"
XL Max load per part Max panel weight Max panel thickness	12 kgs 24 kgs 16mm	26.4 lbs 52.8 lbs .63"	12 kgs 24 kgs 16mm	26.4 lbs 52.8 lbs .63"
IMPORTANT	<ul style="list-style-type: none"> Maximum load per monomount should not exceed the maximum load per E Part. Maximum total load should not exceed the maximum panel weight Maximum panel weight is fixed and does not increase with extra monomounts. 		Installers must ensure that: <ul style="list-style-type: none"> Any of the limits detailed above are not exceeded. A Parts are securely fixed using screws or bolts that are strong enough to support the total load. When A Parts are mounted on brick, concrete or hollow walls etc then anchors, cavity fasteners, plugs or toggles designed for use with that type of wall are used. 	