


multi•mount™

patented standoff system

Aluminium Range		Standard Sizes			Dimensions
Small	Medium	Large	XL	XXL	
This range is available in a natural aluminium finish.					

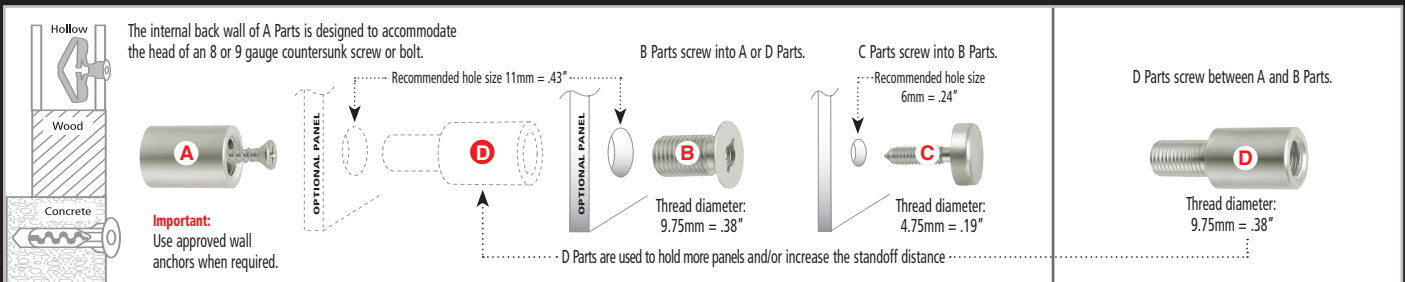

Standard A + B + C Parts	Maximum Part Capacities				Optional Extra D Parts	
PART ▶	B PARTS		C PARTS		D PARTS	
SIZE	Metric	Imperial	Metric	Imperial	Metric	Imperial
SMALL Max load per part Max panel weight Max panel thickness	12 kgs 24 kgs 4mm	26.4 lbs 52.8 lbs .16"	10 kgs 20 kgs 4mm	22 lbs 44 lbs .16"	12 kgs 24 kgs 4mm	26.4 lbs 52.8 lbs .16"
MEDIUM Max load per part Max panel weight Max panel thickness	16 kgs 32 kgs 8mm	35.2 lbs 70.4 lbs .31"	10 kgs 20 kgs 8mm	22 lbs 44 lbs .31"	16 kgs 32 kgs 8mm	35.2 lbs 70.4 lbs .31"
LARGE Max load per part Max panel weight Max panel thickness	20 kgs 40 kgs 12mm	44 lbs 88 lbs .47"	10 kgs 20 kgs 10mm	22 lbs 44 lbs .39"	20 kgs 40 kgs 12mm	44 lbs 88 lbs .47"
XL Max load per part Max panel weight Max panel thickness	24 kgs 48 kgs 16mm	52.8 lbs 105.6 lbs .63"	10 kgs 20 kgs 12mm	22 lbs 44 lbs .47"	24 kgs 48 kgs 16mm	52.8 lbs 105.6 lbs .63"
XXL Max load per part Max panel weight Max panel thickness	28 kgs 56 kgs 19mm	61.6 lbs 123.2 lbs .75"	10 kgs 20 kgs 14mm	22 lbs 44 lbs .55"	28 kgs 56 kgs 19mm	61.6 lbs 123.2 lbs .75"

IMPORTANT

- Maximum load per multimount should not exceed the maximum load per B Part.
- Maximum total load should not exceed the maximum panel weight in the B Parts column.
- Maximum panel weight is fixed and does not increase with extra multimounts.

Installers must ensure that:

- Any of the limits detailed above are not exceeded.
- A Parts are securely fixed using screws or bolts that are strong enough to support the total load.
- When A Parts are mounted on brick, concrete or hollow walls etc then anchors, cavity fasteners, plugs or toggles designed for use with that type of wall are used.