

# pizazz multi-mounts®




www.pizazzsystems.com

## Panel Capacities

### Aluminium Collection

### Sizes and dimensions

D Parts are also available for all sizes in this range.




The internal back wall of **A Parts** are designed to accommodate the head of an 8 or 9 gauge countersunk screw or bolt.

**B Parts** screw into **A** or **D Parts**.

**C Parts** screw into **B Parts**.

**D Parts** screw between **A** and **B Parts**.

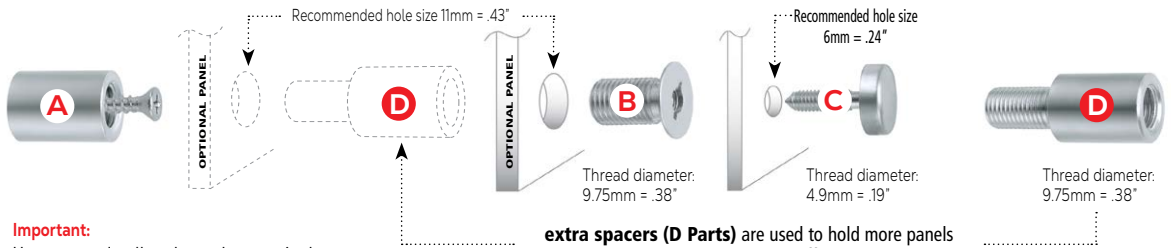

**Important:**  
Use approved wall anchors when required.

**extra spacers (D Parts)** are used to hold more panels and/or increase the standoff distance.

	A+B+C Parts		Maximum capacities B Parts		Maximum capacities C Parts		Optional extra spacers D Parts	
	Small	Medium	Metric	Imperial	Metric	Imperial	Metric	Imperial
Max load per part			12 kgs	26.4 lbs	10 kgs	22 lbs	12 kgs	26.4 lbs
Max panel weight			24 kgs	52.8 lbs	20 kgs	44 lbs	24 kgs	52.8 lbs
Max panel thickness			4mm	.16"	4mm	.16"	4mm	.16"
<b>Medium</b>								
Max load per part			16 kgs	35.2 lbs	10 kgs	22 lbs	16 kgs	35.2 lbs
Max panel weight			32 kgs	70.4 lbs	20 kgs	44 lbs	32 kgs	70.4 lbs
Max panel thickness			8mm	.31"	8mm	.31"	8mm	.31"
<b>Large</b>								
Max load per part			20 kgs	44 lbs	10 kgs	22 lbs	20 kgs	44 lbs
Max panel weight			40 kgs	88 lbs	20 kgs	44 lbs	40 kgs	88 lbs
Max panel thickness			12mm	.47"	10mm	.39"	12mm	.47"
<b>XL</b>								
Max load per part			24 kgs	52.8 lbs	10 kgs	22 lbs	24 kgs	52.8 lbs
Max panel weight			48 kgs	105.6 lbs	20 kgs	44 lbs	48 kgs	105.6 lbs
Max panel thickness			16mm	.63"	12mm	.47"	16mm	.63"
<b>XXL</b>								
Max load per part			28 kgs	61.6 lbs	10 kgs	22 lbs	28 kgs	61.6 lbs
Max panel weight			56 kgs	123.2 lbs	20 kgs	44 lbs	56 kgs	123.2 lbs
Max panel thickness			19mm	.75"	14mm	.55"	19mm	.75"

### IMPORTANT

- Maximum load per multimount should not exceed the maximum load per B Part.
- Maximum total load should not exceed the maximum panel weight in the B Parts column.
- Maximum panel weight is fixed and does not increase with extra multimounts.

### Installers must ensure that:

- Any of the limits detailed above are not exceeded.
- A Parts are securely fixed using screws or bolts that are strong enough to support the total load.
- When A Parts are mounted on brick, concrete or hollow walls etc then anchors, cavity fasteners, plugs or toggles designed for use with that type of wall are used.

# pizazz® multi·mounts®





www.pizazzsystems.com

## Panel Capacities

Hybrid Collection

Sizes and dimensions

D Parts are also available for all sizes in this range.

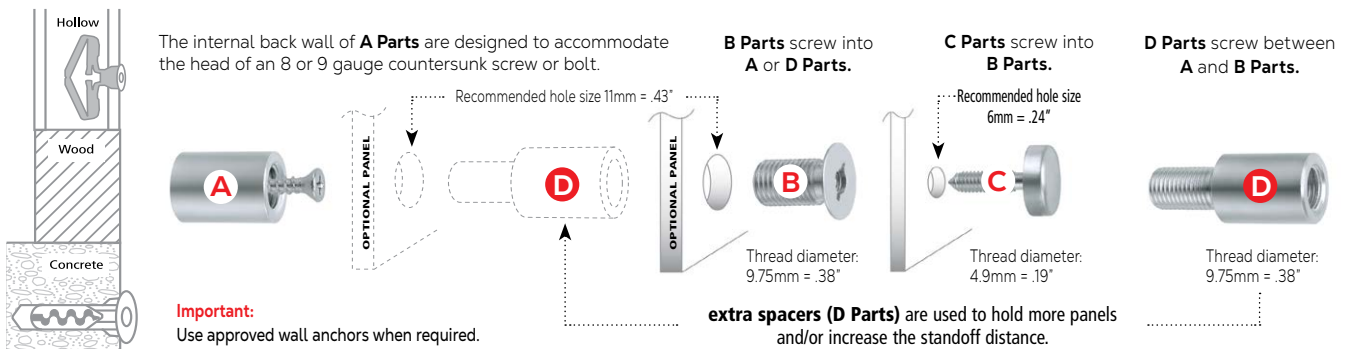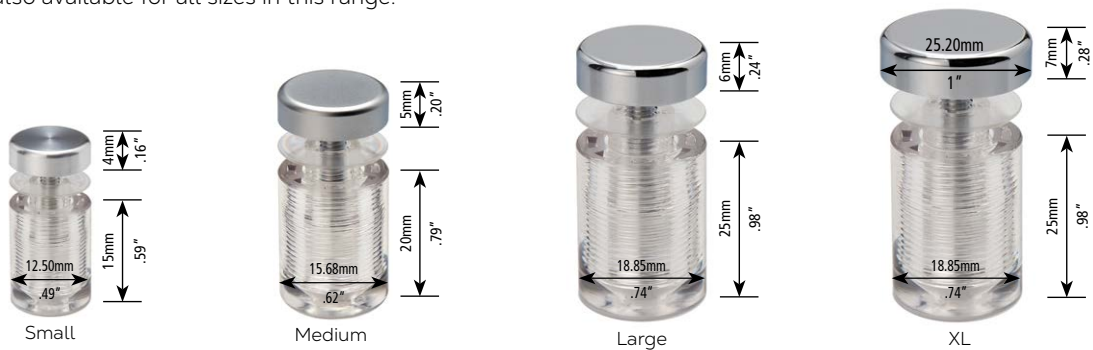

	A+B+C Parts		Maximum capacities B Parts		Maximum capacities C Parts		Optional extra spacers D Parts	
	Small	Metric	Imperial	Metric	Imperial	Metric	Imperial	
Max load per part		6 kgs	13.2 lbs	6 kgs	13.2 lbs	6 kgs	13.2 lbs	
Max panel weight		12 kgs	26.4 lbs	12 kgs	26.4 lbs	12 kgs	26.4 lbs	
Max panel thickness		4mm	.16"	4mm	.16"	4mm	.16"	
<b>Medium</b>								
Max load per part		8 kgs	17.6 lbs	8 kgs	17.6 lbs	8 kgs	17.6 lbs	
Max panel weight		16 kgs	35.2 lbs	16 kgs	35.2 lbs	16 kgs	35.2 lbs	
Max panel thickness		8mm	.31"	8mm	.31"	8mm	.31"	
<b>Large</b>								
Max load per part		10 kgs	22 lbs	10 kgs	22 lbs	10 kgs	22 lbs	
Max panel weight		20 kgs	44 lbs	20 kgs	44 lbs	20 kgs	44 lbs	
Max panel thickness		12mm	.47"	10mm	.39"	12mm	.47"	
<b>XL</b>								
Max load per part		10 kgs	22 lbs	10 kgs	22 lbs	10 kgs	22 lbs	
Max panel weight		20 kgs	44 lbs	20 kgs	44 lbs	20 kgs	44 lbs	
Max panel thickness		16mm	.63"	12mm	.47"	16mm	.63"	

### IMPORTANT

- Maximum load per multimount should not exceed the maximum load per B Part.
- Maximum total load should not exceed the maximum panel weight in the B Parts column.
- Maximum panel weight is fixed and does not increase with extra multimounts.

### Installers must ensure that:

- Any of the limits detailed above are not exceeded.
- A Parts are securely fixed using screws or bolts that are strong enough to support the total load.
- When A Parts are mounted on brick, concrete or hollow walls etc then anchors, cavity fasteners, plugs or toggles designed for use with that type of wall are used.

# pizazz® multi-mounts




www.pizazzsystems.com

## Panel Capacities

Resin Collection

Sizes and dimensions

D Parts are also available for all sizes in this range.

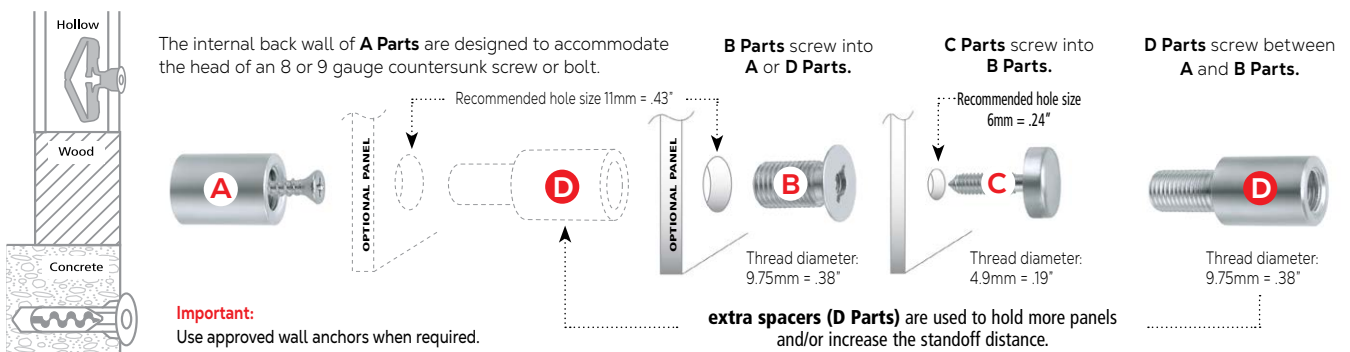

A+B+C Parts	Maximum capacities B Parts		Maximum capacities C Parts		Optional extra spacers D Parts	
	Metric	Imperial	Metric	Imperial	Metric	Imperial
<b>Small</b>						
Max load per part	6 kgs	13.2 lbs	4 kgs	8.8 lbs	6 kgs	13.2 lbs
Max panel weight	12 kgs	26.4 lbs	8 kgs	17.6 lbs	12 kgs	26.4 lbs
Max panel thickness	4mm	.16"	4mm	.16"	4mm	.16"
<b>Medium</b>						
Max load per part	8 kgs	17.6 lbs	4 kgs	8.8 lbs	8 kgs	17.6 lbs
Max panel weight	16 kgs	35.2 lbs	8 kgs	17.6 lbs	16 kgs	35.2 lbs
Max panel thickness	8mm	.31"	8mm	.31"	8mm	.31"
<b>Large</b>						
Max load per part	10 kgs	22 lbs	4 kgs	8.8 lbs	10 kgs	22 lbs
Max panel weight	20 kgs	44 lbs	8 kgs	17.6 lbs	20 kgs	44 lbs
Max panel thickness	12mm	.47"	10mm	.39"	12mm	.47"

### IMPORTANT

- Maximum load per multimount should not exceed the maximum load per B Part.
- Maximum total load should not exceed the maximum panel weight in the B Parts column.
- Maximum panel weight is fixed and does not increase with extra multimounts.

### Installers must ensure that:

- Any of the limits detailed above are not exceeded.
- A Parts are securely fixed using screws or bolts that are strong enough to support the total load.
- When A Parts are mounted on brick, concrete or hollow walls etc then anchors, cavity fasteners, plugs or toggles designed for use with that type of wall are used.